



MASTERPIECE

LED Technology

F6 Interactive Indoor & outdoor LED

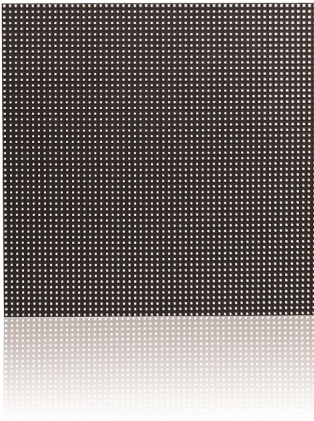

Specifications


LED Type	SMD 2727
Cabinet Size(WXHXDmm)	500x500x82 mm
Cabinet Resolution	80x80 pixel
Module Quantity pcs/cabinet	4
Module Pixels	1600 pixels
Cabinet Pixels	6400 pixels
Average Power Consumption	200 watt
Max. Power Consumption	400 watt
Material Die-Cast	Die Cast Magnesium Alloy
Cabinet Weight	13kg
Transparent	No
Max Load Capacity	2000kg
Brightness	≥5000 nit
Colors	68 Billion
Cooling System	Fan-Less Heat Dissipation
View Angle	Horizontal 120°, Vertical 120°
Min. Viewing Distance	3 meters
Brightness Control	Red,Green and Blue 256 Grade/Each
Fresh frequency	≥1920Hz
Frame Frequency	50 - 60Hz
Input Voltage	200~240 (or100~120)
Defects Rate	≤0.00001
Life span	≥100,000 hours
Module Brightness Uniformity	<3%
Gray Scale	65536
Earth Leakage Current	<3mA
Ingress Protection (front / rear)	IP65/IP54
Controlling system	HD-MPVP2 (DVI,HD-SDI, HDMI, Etc)

Safety warnings




1. Please don't install this LED Screen in intense magnetic and high-voltage fields.
2. To reduce the risk of component damage and fire caused by short circuit, make sure correct connection
3. Check if the voltage and power input suit the LED requirement
4. Don't connect cables with power on, make sure a correct connection and no short circuit checked with instrument before power on.
5. Please don't open Receiver cover while still LED still on to avoid risk.

Dimensions

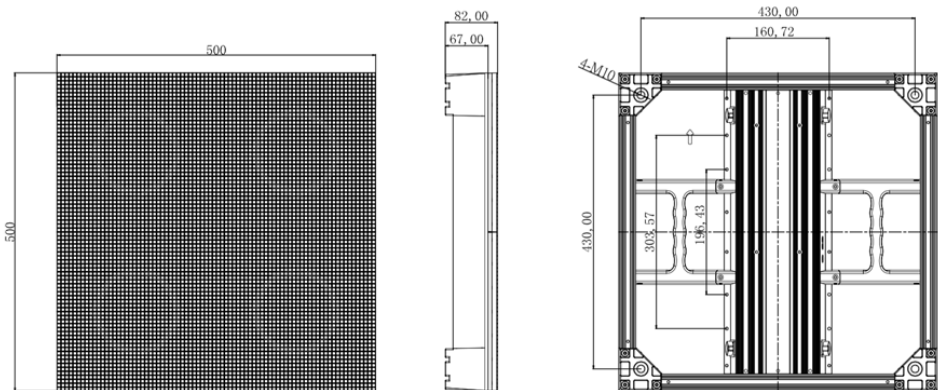

F6 Feature :

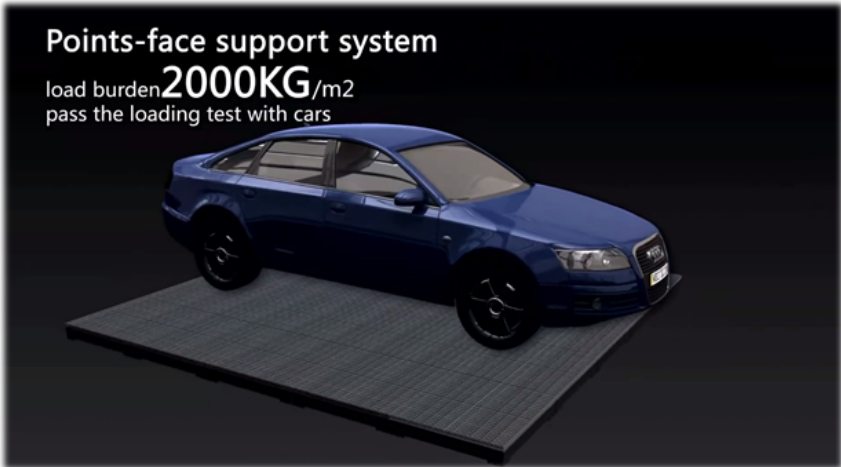

With Fan-less dissipation structure, it offers maximum 2000kg loading capacity per sqm

Touch screen for interactive play

